


Included Components

- A. Hardware Packet with instructions
- B. Handblown Glass (QTY 10)
- C. Canopy
- D. Threaded Rod Assembly, with instructions (QTY:2)
- E. 4-40 Phillips Flat Head Screws (QTY:24) (QTY:40 FOR LUNA) (NOT USED FOR BLOSSOM/GAIA)
- F. Driver (QTY:2)

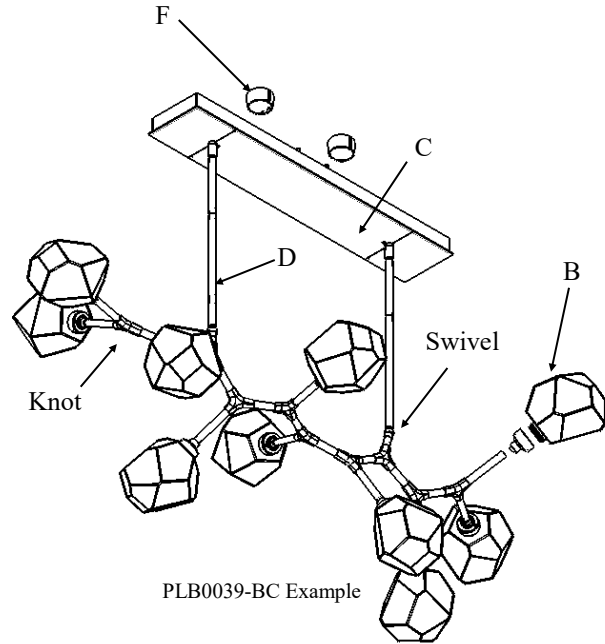


Required Tools

1. Philips screw driver (not included)
2. Wire cutters/strippers (not provided)
3. Measuring tape (not provided)
4. 1/16 Allen Key (provided)

Assembly Instructions


Step 1: Using the provided **Threaded Rod assembly Instructions**, assemble the light to the desired Over All Height (OAH). Loctite must be used on the threaded rods before final install.

NOTE: The fixture will arrive separated. Join the two halves together by inserting the Stem into the Knot and tightening the Set Screw using the 1/16 Allen Key. Refer to Figure A.

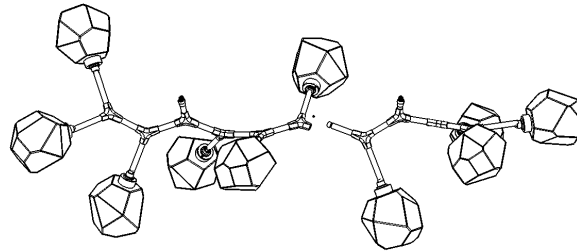

Step 2: Attach one end of the threaded rod to the Swivel mounted to the center Knot. Repeat with the adjacent rod.

Step 3: Remove canopy cover plates and attach the other end of the threaded rod to the canopy. Gently pushing the wires through the rods and into the canopy.

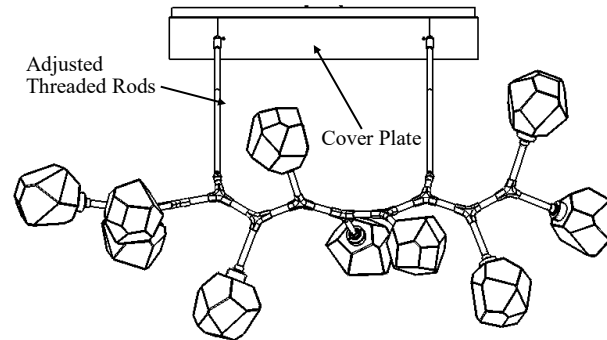

Fixture before End glass pieces are attached.
Example (PLB0061-50)


Step 4: Ensure drivers are securely fixed inside of canopy with 4-40 pan head screws.

Step 5: Connect the direct current (DC) wires from the fixture to the driver. (**Black to Black and Red to Red**)

Step 6: Connect drivers to source power. The wires must be connected to the driver, **Black to Black and White to White**.

NOTE: RED and BLACK wires are for DC power only. Wiring these to AC power will damage the drivers.

NOTE: Wires will be labelled as 250-42 or 500-32, denoting which driver they are intended for. It is required that the correct wires are connected to the respective drivers as shown below.

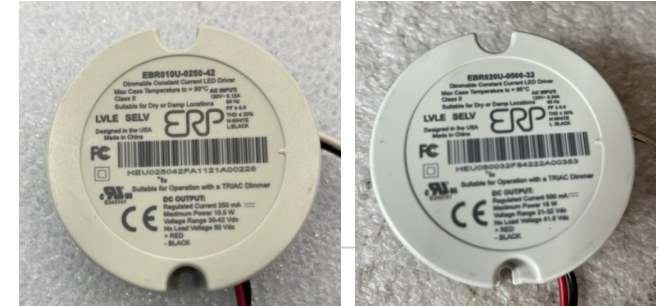

Step 7: Mount the fixture to the ceiling or J-Box following the provided **Mounting Instructions**. Once mounted, **carefully** slide cover plate back along rod set to meet canopy and re attach using 8-32 flat head screws.

Position of branch knots may be adjusted *Before Glass is Installed* with the included 1/16 Allen key. **DO NOT ROTATE 90 DEGREES PAST ORIGINAL POSITION. ENSURE SET SCREW IS FLUSH WITH KNUCKLE AND TIGHTLY FIXED INTO THREADS.**

Figure A


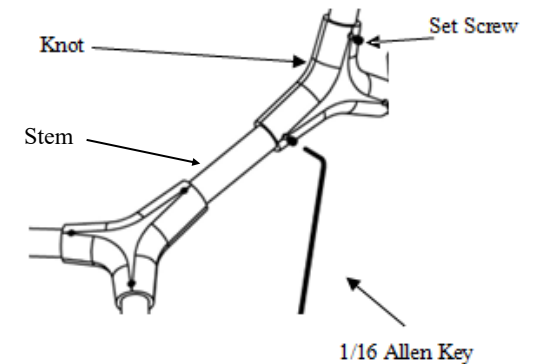


Diagram A

Step 8: Install glass into LED housing with provided 4-40 Phillips flat head screws. **(Item E)**


NOTE: Install glass one at a time, ensuring fixture remains balanced. **TWO INDIVIDUALS ARE HIGHLY RECOMMENDED**

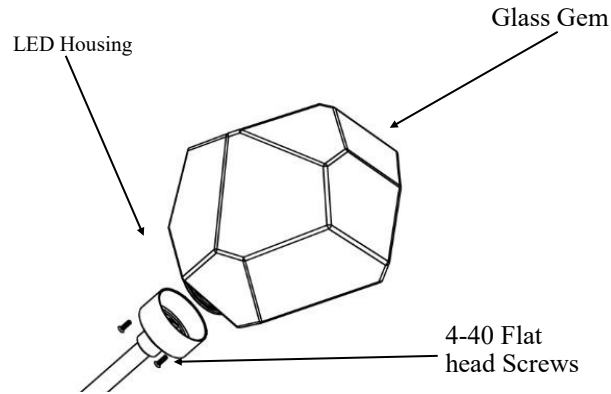

FOR: BLOSSOM - Diagram B


Step 8: Install Blossom glass to LED housing by screwing the threaded collar on the glass into the threaded glass housing.

NOTE: Install glass one at a time, ensuring fixture remains balanced. **TWO INDIVIDUALS HIGHLY RECOMMENDED FOR GLASS INSTALLATION.**

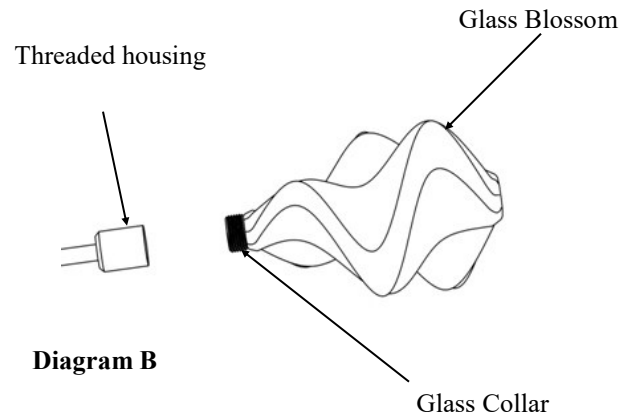


FOR: LUNA - Diagram C

Step 8: Install Inner glass diffuser to LED housing by screwing the threaded collar on the glass into the threaded glass housing. Install Luna glass to LED housing by screwing in four 4-40 screws into the Luna lens retention collar.

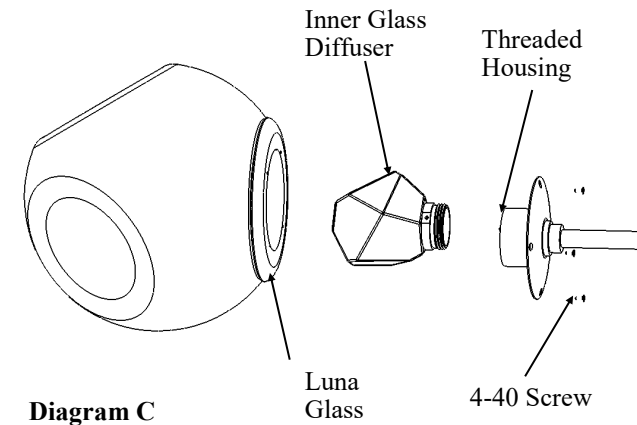

FOR: GAIA - Diagram D:

Step 8: Install glass to LED housing by screwing the threaded collar on the glass into the threaded housing on the fixture.

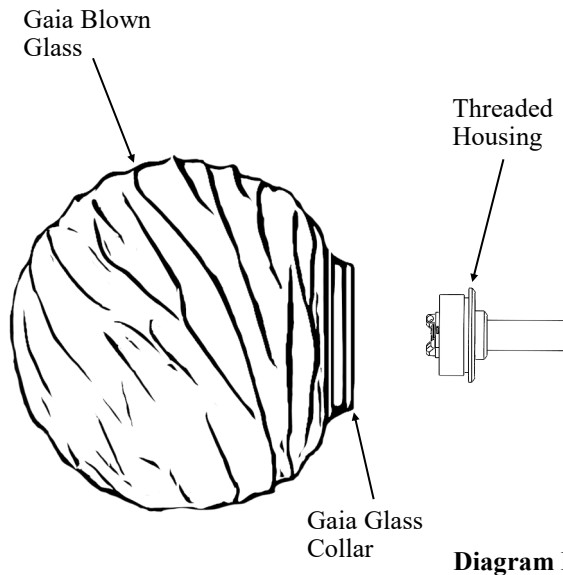

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095 EXT: 4
www.hammerton.com

ONE YEAR LIMITED WARRANTY

Hammerton, Inc. (Hammerton) warrants the original owner that this product will be free of defects in material or workmanship for the period of one year from the date of original purchase from Hammerton, if (i) the allegedly defective product has not been abused, misused or improperly maintained and or repaired during the warranty period, (ii) the defect is not caused by water damage/flooding, fire, explosion, earthquakes or similar phenomenon, and (iii) the defect is not caused by improper installation (unless installed by Hammerton).

In order to obtain warranty service, the user must first complete a warranty claims form. Hammerton will determine if the product will be inspected on site or returned to Hammerton. If after the inspection Hammerton finds that the product is defective as claimed, Hammerton will, at its option, repair or replace the product free of charge, or Hammerton may also agree to outsource necessary repair work locally using local contracted labor. Prior to any outsourcing of repair work regarding this fixture, a Work Authorization Form must be signed by both the client and Hammerton Representative. Failure to do so may result in a denial of reimbursement. Hammerton warrants any replaced or repaired products for ninety days after shipment or through the end of the original warranty period, whichever is longer. All products or parts that are replaced become the property of Hammerton.


No representative or employee of Hammerton is authorized to make any modification or addition to this limited warranty.

TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING WARRANTY AND REMEDIES ARE EXCLUSIVE, AND HAMMERTON EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TO THE FULL EXTENT ALLOWED BY LAW, HAMMERTON EXCLUDES AND DISCLAIMS LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE FOR ANY CONSEQUENTIAL, INDIRECT INCIDENTAL OR SPECIAL DAMAGES OF ANY NATURE ARISING OUT OF THE SALE INSTALLATION, MAINTENANCE, USE OR FAILURE OF THIS PRODUCT, EVEN IF HAMMERTON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES IN ADVANCE, AND HAMMERTON LIMITS ITS LIABILITY TO REPLACEMENT, REPAIR OR REFUND OF THE PURCHASE PRICE PAID, AT HAMMERTON'S OPTION.)

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION ON IMPLIED WARRANTY AND INCIDENTAL OR CONSEQUENTIAL DAMAGES MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS YOU MAY HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE

Assembly Instructions LED, MODERN BRANCH

PLB00XX-BC

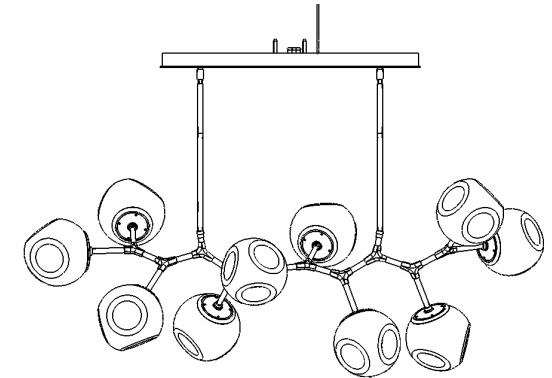

PLB0086-BC

WARNING: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.